

Vendor:Cisco

**Exam Code:**300-206

**Exam Name:**Implementing Cisco Edge Network Security Solutions

Version: Demo

Which two Cisco products can be managed by Cisco Security Manager? (Choose two.)

- A. Cisco IOS routers
- B. Cisco Email Security Appliance
- C. Cisco IPS 4200 and 4500 Series sensors
- D. Cisco Web Security Appliance
- E. Cisco wireless LAN controllers

Correct Answer: CD

#### **QUESTION 2**

Which three options describe how SNMPv3 traps can be securely configured to be sent by IOS? (Choose three.)

- A. An SNMPv3 group is defined to configure the read and write views of the group.
- B. An SNMPv3 user is assigned to SNMPv3 group and defines the encryption and authentication credentials.
- C. An SNMPv3 host is configured to define where the SNMPv3 traps will be sent.
- D. An SNMPv3 host is used to configure the encryption and authentication credentials for SNMPv3 traps.
- E. An SNMPv3 view is defined to configure the address of where the traps will be sent.
- F. An SNMPv3 group is used to configure the OIDs that will be reported.

Correct Answer: ABC

## **QUESTION 3**

Which option describes the purpose of the input parameter when you use the packet-tracer command on a Cisco device?

- A. to provide detailed packet-trace information
- B. to specify the source interface for the packet trace
- C. to display the trace capture in XML format
- D. to specify the protocol type for the packet trace

Correct Answer: B

To which interface on a Cisco ASA 1000V firewall should a security pro	rofile be applied when a	VM sits behind it?
--	--------------------------	--------------------

- A. outside
- B. inside
- C. management
- D. DMZ

Correct Answer: B

#### **QUESTION 5**

Cisco Security Manager can manage which three products? (Choose three.)

- A. Cisco IOS
- B. Cisco ASA
- C. Cisco IPS
- D. Cisco WLC
- E. Cisco Web Security Appliance
- F. Cisco Email Security Appliance
- G. Cisco ASA CX
- H. Cisco CRS

Correct Answer: ABC

## **QUESTION 6**

When you install a Cisco ASA AIP-SSM, which statement about the main Cisco ASDM home page is true?

- A. It is replaced by the Cisco AIP-SSM home page.
- B. It must reconnect to the NAT policies database.
- C. The administrator can manually update the page.
- D. It displays a new Intrusion Prevention panel.

Correct Answer: D

#### **QUESTION 7**

Which four are IPv6 First Hop Security technologies? (Choose four.)

- A. Send
- B. Dynamic ARP Inspection
- C. Router Advertisement Guard
- D. Neighbor Discovery Inspection
- E. Traffic Storm Control
- F. Port Security
- G. DHCPv6 Guard

Correct Answer: ACDG

#### **QUESTION 8**

Which feature do you enable to restrict the interface on which mgmt traffic can be received by the routes on your network?

- A. MPP
- B. CPP with a port xxx
- C. AAA
- D. extended ACL on all int

Correct Answer: A

control-plane host management-interface G0/0 allow ssh https snmp

#### **QUESTION 9**

Configuration of SSH on ASA

Ip ssh version 2	Ssh version 2	
Enable password <password></password>	Enable password for SSH	
Username <username> password <password< td=""><td>Username and password for SSH</td></password<></username>	Username and password for SSH	
crypto key generate rsa modulus 1024	Generate SSH key	
aaa authentication ssh console LOCAL	Enable AAA for SSH	
ssh 192.168.1.0 255.255.255.0 trust	Access host for SSH	
Ip domain-name	Create host domain for SSH	

Correct Answer:
Cisco ASA correction:
domain-name
crypto key generate rsa modulus
ssh version 2
enable password
username password
aaa authentication ssh console LOCAL
ssh
Cisco IOS correction:
domain-name
crypto key generate rsa modulus
ip ssh version 2
enable secret 0
username secret 0
aaa new-model
aaa authentication login default local-case enable
line vty 0 4
transport input ssh
login authentication default

What is the benefit of centralized ESA management?

- A. Protection against flash threats
- B. Administration of multiple autonomous systems
- C. Easier administration
- D. Virtualised e-mail partitions

Correct Answer: C


Which three configurations are needed to enable SNMPv3 support on the Cisco ASA? (Choose three.)

- A. SNMPv3 Local EngineID
- B. SNMPv3 Remote EngineID
- C. SNMP Users
- D. SNMP Groups
- E. SNMP Community Strings
- F. SNMP Hosts

Correct Answer: CDF

#### **QUESTION 12**

Refer to the exhibit. What is the default behavior expected upon running the ip dhcp snooping vlan 10 command?

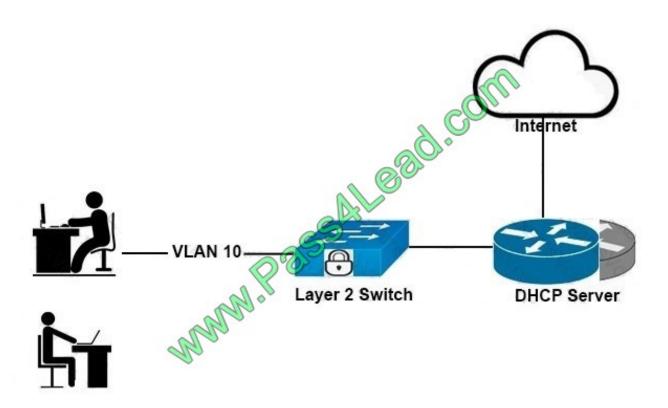

- A. All of the switch ports in VLAN 10 are trusted.
- B. All of the switch ports in VLAN 10 are untrusted.
- C. All of the ports that are not placed in VLAN 10 are untrusted.

D. The user can obtain an IP address via DHCP.

Correct Answer: A

To Read the Whole Q&As, please purchase the Complete Version from Our website.

# Try our product!

100% Guaranteed Success

100% Money Back Guarantee

365 Days Free Update

**Instant Download After Purchase** 

24x7 Customer Support

Average 99.9% Success Rate

More than 800,000 Satisfied Customers Worldwide

Multi-Platform capabilities - Windows, Mac, Android, iPhone, iPod, iPad, Kindle

# **Need Help**

Please provide as much detail as possible so we can best assist you. To update a previously submitted ticket:





Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.